


15K Foot Operated Dump Style Control Guns

Typical Foot Gun Hookup These foot operated control valves (foot guns) are designed for smooth reliable operation. They are easily rebuilt in the field in 30 seconds by unscrewing the dump tube, which removes the used valve assembly. The operator then snaps a new cartridge style valve into the dump tube adapter and returns the whole assembly to the gun.

To prevent low pressure water from the flex lance nozzle spraying back towards the operator, when the foot gun is in dump mode, it is recommended that a Nozzle Shut-off Valve (Part # 60-010-050) is used between the foot gun and the flex lance. This will help to minimize cleanup at the end of the job and greatly assist the operator when inserting the lance into the next tube. (see diagram below).

Strain Relief Whip Hoses (Part # 43-004-003) are designed to relieve the forces on the flex lance end fitting, which extends the life of the lance, and reduces the risk to the operator associated with the end fitting failing prematurely.

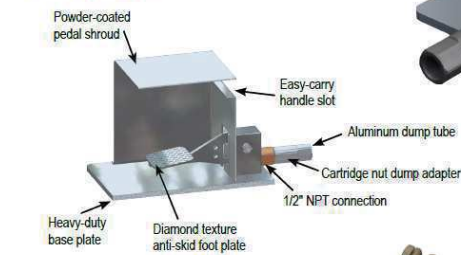


Part #	Description
61-010-012	Complete Foot Style Control Gun

The APS 15K Foot Operated Control Guns feature:

- Fully enclosed safety shrouds.
- Easy-carry handles.
- Quick-change cartridge overhaul.
- Non-slip foot pedals.

Easy-Change Cartridge Assembly The cartridge assembly enables rebuilding of the gun in the field in 30 seconds or less with common tools.

#60-010-020

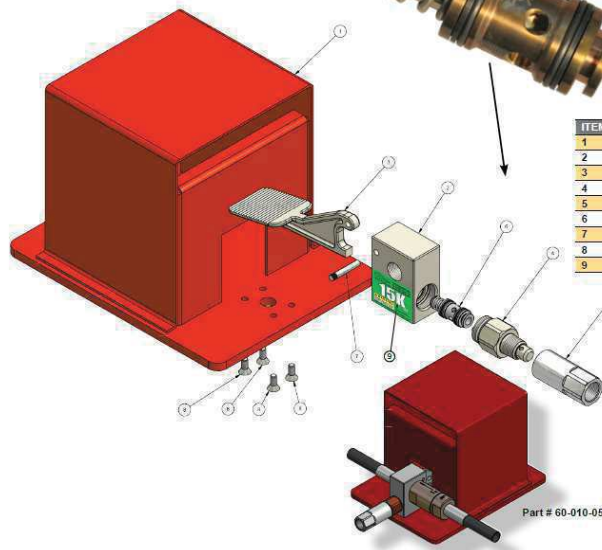

ITEM	Part #	Descriptions
1	61-010-004	Foot Gun Base Complete Assy
2	61-010-003	15K Foot Gun Block
3	61-010-007	Foot Pedal Casting
4	61-010-001	15K Dump Adapter
5	61-010-002	Dump Tube
6	60-010-020	15K Cartridge Assembly
7	60-010-021	Trigger Pivot Pin
8	10-201-063	1/4"-20 C'Sink Screw 0.625 Long
9	61-010-003D	15K psi Safety Decal - Gun Block